





Strata Rib®

**STANDING BY OUR PRODUCTS
AND WARRANTIES FOR 40 YEARS**

Strata Rib is a light gauge, exposed fastener panel with 36" coverage used in residential roof and wall applications.

FEATURES AND BENEFITS

- Weather-resistant lap system with anti-siphon groove provides better weathertightness compared to most other light gauge, exposed fastener panels.
- Purlin-bearing leg speeds up installation of panels and improves the quality of panel side laps.
- Available in our Dura Tech® xl paint system or our ZINCALUME® Plus finish for unpainted applications; limited lifetime warranty available on residential applications.
- ColorGuard™ 25 with Spectrascape® available with a 25 year limited warranty for your agricultural, post frame and recreational building applications.
- Economical standard and custom trim packages available with every order.
- Strata Rib panel assemblies are Class A Fire Rated when installed on non-combustible deck or framing per IBC or IRC. Strata Rib panel assemblies are also Class A Fire Rated per UL790 when installed in accordance to UL listings.

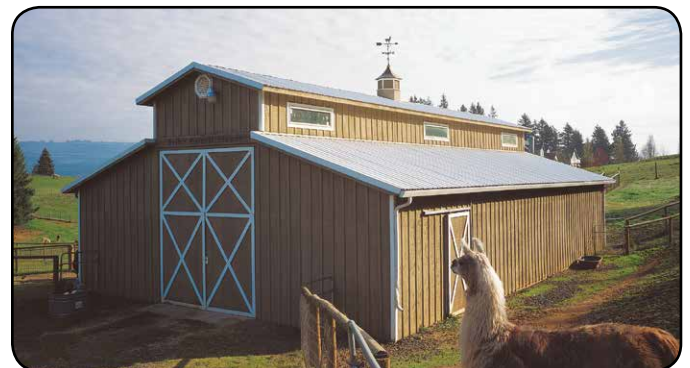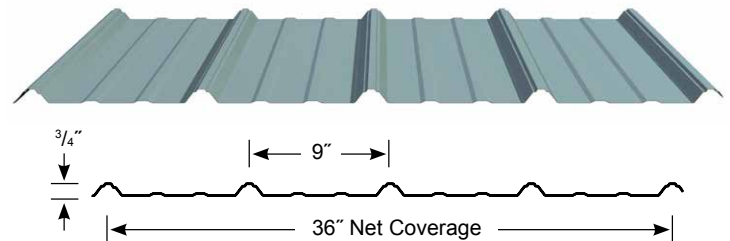

Customer Service, Salem OR
503-390-7174 or 800-272-7023
Customer Service, Spokane WA
509-536-4097 or 800-776-8771
www.ascbp.com

Cool DURA TECH XL

COOL Dura Tech xl keeps the heat out and the color brilliant.

- Superior color retention and resistance to chalk and fade.
- Dura Tech xl energy saving **COOL** colors reduce the demand for energy.



REPRESENTATION OF COLORS MAY VARY DUE TO PRINTING LIMITATIONS.

Sample color chips are available upon request. Consult your ASC Building Products representative for more information.

LOAD TABLE

| Gauge | Span | Cond. | Allowable Inward Loads (lbs/ft²) per Span (ft.-in.) | | | | | | |
|-------------|-------------|-------|---|-------|-------|-------|-------|-------|-------|
| | | | 2'-0" | 2'-6" | 3'-0" | 3'-0" | 4'-0" | 4'-6" | 5'-0" |
| 29 | Single Span | W/Ω | 101 | 65 | 45 | 33 | 25 | 20 | 16 |
| | | L/180 | - | 56 | 32 | 20 | 14 | 10 | 7 |
| | Double Span | W/Ω | 84 | 54 | 37 | 27 | 21 | 16 | 13 |
| 26 | Single Span | W/Ω | 124 | 80 | 55 | 41 | 31 | 25 | 20 |
| | | L/180 | - | 69 | 40 | 25 | 17 | 12 | 9 |
| | Double Span | W/Ω | 105 | 67 | 47 | 35 | 26 | 21 | 17 |
| Triple Span | W/Ω | 130 | 84 | 58 | 43 | 33 | 26 | 21 | |
| | L/180 | - | - | - | - | 32 | 22 | 16 | |

- NOTES:** (Specifications subject to change without notice.)
- The information in these tables applies to uniform loads only.
 - Upper values based on allowable panel strength. Bottom values based on allowable service load deflection of L/180.
 - "-" denotes that capacities are limited by panel strength vs. deflection.
 - Steel conforms to ASTM A792 (Zincalume) 50,000 psi minimum yield.
 - Values are based on AISI S100-12

COLORGUARD 25 with Spectrascape

ColorGuard™ 25 with Spectrascape is a robust and economical paint system.

- Resistant to chalk and fade with ratings similar to a PVDF.
- Engineered to resist peeling or cracking for 25 years.



Product Availability by Gauge and Location

| Location | Anchorage Alaska | Sacramento California | Spokane Washington | Salt Lake City Utah |
|---------------|------------------|-----------------------|--------------------|---------------------|
| Dura Tech xl | 29ga | 29ga & 26ga | 29ga | 29ga |
| ColorGuard 25 | 29ga | 29ga* | 29ga | 29ga |

Additional lead times apply on products supplied from a non-local facility.

* ColorGuard 25 colors that meet a minimum .25 solar reflectivity.


** ColorGuard 25 Light Stone 29ga available in Sacramento.



| Gauge | Section Properties | | | | |
|-------|--------------------|-------------|-------------|-------------|-------------|
| | Wt. (lbs/ft²) | I+ (in³/ft) | S+ (in³/ft) | I- (in³/ft) | S- (in³/ft) |
| 29 | 0.65 | 0.0100 | 0.0169 | 0.0078 | 0.0143 |
| 26 | 0.81 | 0.0123 | 0.0208 | 0.0099 | 0.0179 |

LOADING TABLE LEGEND

- W/Ω- Allowable panel strength
- L - Span
- L/180 - Load limited by a deflection of 1/180 of the span
- w - Distributed load

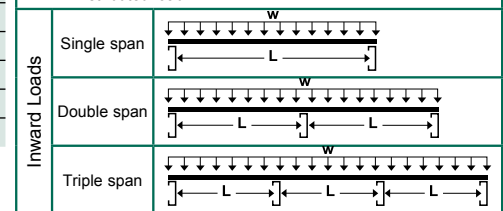

ASC Building Products
is Proudly Distributed by:

